ACCESSORY

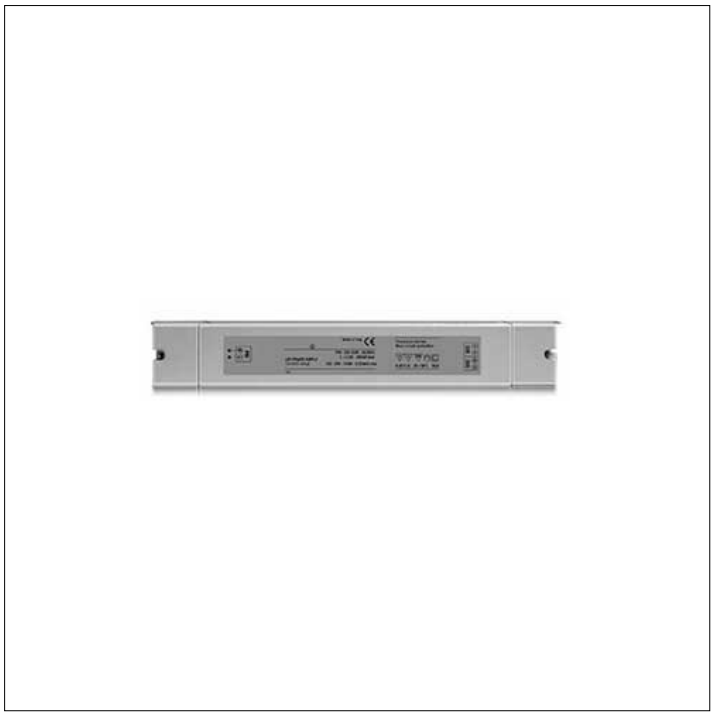

S.2442
POWER SUPPLY DIMMABLE DALI2, PUSH DIM, 0-10V, 1-10V 230Vac/24Vdc 75W 244Hz IP20

Dimmable DALI2, PUSH DIM, 0-10V, 1-10V for monochromatic LED 75W 240V/24Vdc The Total power of all connected luminaires may not be higher than the power of the driver. IP20 CLASS II SELV PWM Frequency : 244Hz Dimensions 280mmx40mmx29mm
WE SUGGEST TO USE ONE SURGE PROTECTION DEVICE (S.2499) FOR EACH REMOTE DRIVER AT A DISTANCE OF NO MORE THAN 10m AWAY.

SIMES S.p.A. - Via G.Pastore 2/4 - 25040 - Corte Franca (BRESCIA) ITALY - www.simes.it - e-mail: simes@simes.it
Export Sales: Tel. +39 0309860440 / Technical Dep.: Tel. +39 0309860450 / Lighting Design Dep.: Tel. +39 0309860425

The present technical data sheet and all the information contained is property of SIMES S.p.A. All rights reserved.
We reserve the right to change specifications without prior written notice.