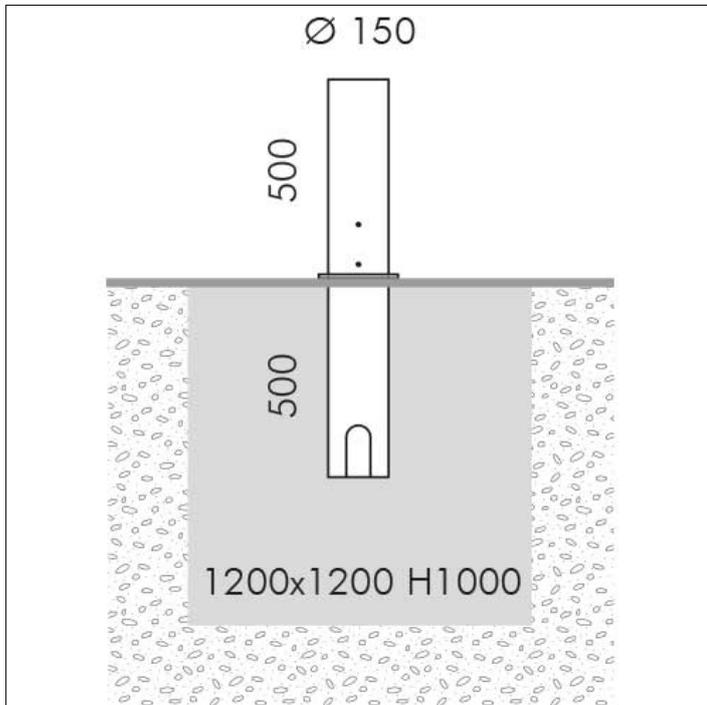


ACCESSORY

**S.4219**
FLANGE FOR SAFETY BOLLARD

Resistant to vehicle impact of 3500Kg up to max speed of 50km/h. Steel flange h 500mm to be cemented in ground. Rooted 500mm into reinforced concrete plinth $1200 \times 1200 \times 1000$ mm (the flange must be welded to the plinth's rebar).